





PACKAGE DIMENSION

TY-1309UY4

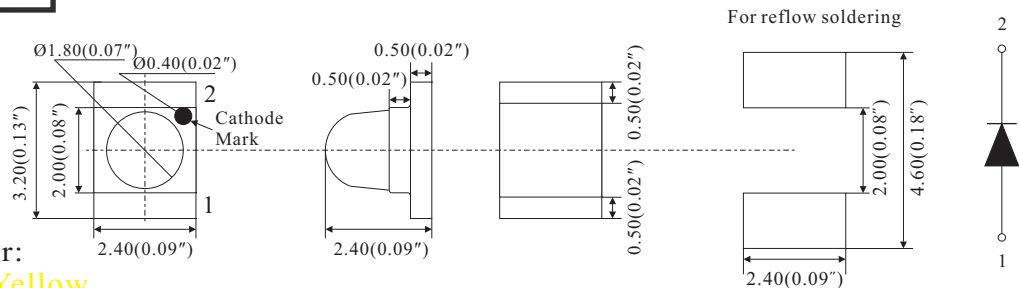

Features:

1. Emitted Color:
Ultra Bright Yellow.
2. Lens Appearance:
Water Clear

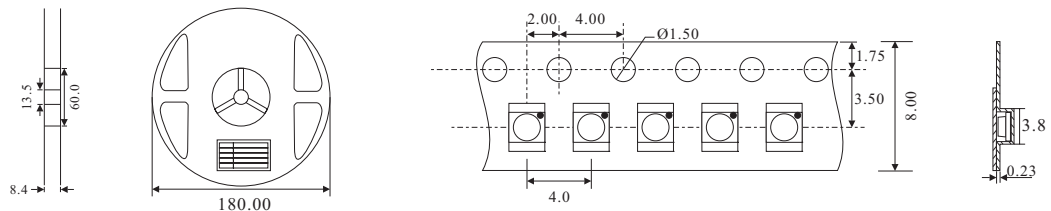

Absolute Maximum Ratings at $T_A=25^\circ\text{C}$

Parameter	Symbol	Maximum Rating	Units
Power Dissipation	Pd	75	mW
Forward Current	I _F	30	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width.)	I _{FP}	125	mA
Reverse Voltage	V _R	5	V
Operating Temperature	Topr	-20°C to +80°C	
Storage Temperature	Tstg	-20°C to +80°C	

Electrical / Optical Characteristics at $T_A=25^\circ\text{C}$

Parameter	Symbol	MIN.	TYP.	MAX.	Units	Test Condition
Forward Voltage	V _f	-	2.00	2.50	V	I _F =20mA
Luminous Intensity	I _v	1500	3500	-	mcd	I _F =20mA
Reverse Current	I _R	-	-	10	uA	V _R =5V
Peak Wavelength	λ_p	-	592	-	nm	I _F =20mA
Dominant Wavelength	λ_d	585	592	599	nm	I _F =20mA
Spectral Line Half-width	$\Delta\lambda$	-	20	-	nm	I _F =20mA
Viewing Angle	2 $\theta_{1/2}$	-	15	-	deg	I _F =20mA

1. All dimension are in millimeters (inches);
2. Tolerance is $\pm 0.10\text{mm}$ ($0.004"$) unless otherwise specified;
3. Luminous intensity tolerance is $\pm 10\%$;
4. 1,500pcs in a reel.