



TOYO LED ELECTRONICS LIMITED

Room 1610, Hong Kong Plaza, 188 Connaught Road West, Hong Kong.

Tel: (852) 2540 7288


Fax: (852) 2517 1797

http://www.toyo-led.com

E-mail: sales@toyo-led.com




CANDLE 5W Series

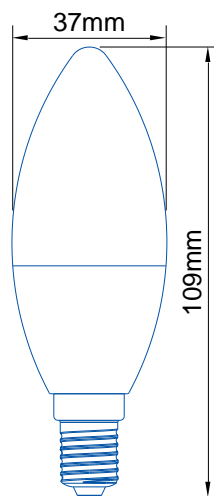

Specification Features

- Can replace 40W incandescent candle light
- High thermal conductive aluminum housing
- Uniform illumination with LED bar design
- Super matching for crystal chandelier
- Operating temperature: -25~50°C
- Operating Humidity: 0~85%
- Ingress Protection: IP44
- Lifespan (Ta=25°C): 20000 hours
- Beam Angle = 360 °
- Net Weight: 46g
- Housing Materials: Aluminum+PC



Part No.	Power (W)	Input(V)	PF	CCT (K)	Luminous (lm)	CRI	Lamp Base	Cover	Size(mm)
TY-5WCA-A-A301	5	AC85-264	>0.5	3000	475	>80	E14	Transparent	φ37xL109mm
TY-5WCA-A-A401	5	AC85-264	>0.5	4000	485	>80	E14	Transparent	φ37xL109mm
TY-5WCA-A-A601	5	AC85-264	>0.5	6000	500	>80	E14	Transparent	φ37xL109mm
TY-5WCA-A-A302	5	AC85-264	>0.5	3000	450	>80	E14	Milky white	φ37xL109mm
TY-5WCA-A-A402	5	AC85-264	>0.5	4000	455	>80	E14	Milky white	φ37xL109mm
TY-5WCA-A-A602	5	AC85-264	>0.5	6000	465	>80	E14	Milky white	φ37xL109mm