



# TOYO LED ELECTRONICS LIMITED

Room 1610, Hong Kong Plaza, 188 Connaught Road West, Hong Kong.  
Tel : (852) 2540 7288 Fax : (852) 2517 1797  
http://www.toyo-led.com E-mail : sales@toyo-led.com



## P/N: TY-PSV0805UG1(1.0)

0805 Package 2.0\*0.6mm Surface Mount LEDs Side View Series

### ✧ Features:

- 2.1mm x 0.6mm SMT LED, 1.0mm thickness
- Mono-color type
- Soldering methods :All SMT assembly methods
- Comply ROHS standard






### ✧ Description

The Yellow Green source color devices are made with **AlGaInP** on sapphire Light Emitting Diode.



### ✧ Application

- Optical indicator
- Indicator and backlighting in telephone and fax
- Flat backlight for LCD, switch and symbol
- Light pipe application
- General use

### ✧ Package Dimensions



For reflow soldering (Propose)



### NOTES:

1. All dimensions are in millimeter[unit];
2. Tolerance is  $\pm 0.1\text{mm}$  (0.004 ") especially other specified;
3. Specifications are subject to change without notice.



# TOYO LED ELECTRONICS LIMITED

Room 1610, Hong Kong Plaza, 188 Connaught Road West, Hong Kong.  
 Tel : (852) 2540 7288 Fax : (852) 2517 1797  
 http://www.toyo-led.com E-mail : sales@toyo-led.com



## P/N: TY-PSV0805UG1(1.0)

0805 Package 2.0\*0.6mm Surface Mount LEDs Side View Series

Part No.	Emitted Color	Len's Color	Chip Material
TY-LSV0802UG1(1.0)	Yellow Green	Water Clear	AlGaInP

### ✧ Absolute Maximum Ratings(Ta=25°C)

Item	Symbol	Maximum	Unit
Power Dissipation	PD	60	mW
Continuous Forward Current	I <sub>Fmax</sub>	30	mA
Peak Forward Current(1/10 Duty Cycle 0.1ms Pulse Width)	I <sub>FP</sub>	70	mA
Reverse Voltage	V <sub>R</sub>	5	V
Operating Temperature Range	T <sub>opr</sub>	-40 to+85	25°C
Storage Temperature Range	T <sub>stg</sub>	-40 to+85	25°C

### ✧ Electrical/Optical Characteristics(Ta=25°C)

Item	Symbol	Condition	Min.	Typ.	Max	Unit
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =20mA	1.8	2.0	2.2	V
Luminous Intensity	I <sub>v</sub>	I <sub>F</sub> =20mA	10	30	55	mcd
Wavelength	λ	I <sub>F</sub> =20mA	573	--	575	nm
Typical Correlated Color Temperature	T <sub>c</sub>	I <sub>F</sub> =20mA	--	---	--	K
Chromaticity Coordinates	X	I <sub>F</sub> =20mA	--	--	--	--
	Y	I <sub>F</sub> =20mA	--	--	--	--
Viewing Angle	2θ <sub>1/2</sub>	I <sub>F</sub> =20mA	--	130	--	Deg
Capacitance	C	V <sub>F</sub> =0V, f=1MHZ	--	45	--	pF
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =5V	--	5	10	uA



# TOYO LED ELECTRONICS LIMITED





Room 1610, Hong Kong Plaza, 188 Connaught Road West, Hong Kong.  
Tel : (852) 2540 7288 Fax : (852) 2517 1797  
http://www.toyo-led.com E-mail : sales@toyo-led.com




**P/N: TY-PSV0805UG1(1.0)**

0805 Package 2.0\*0.6mm Surface Mount LEDs Side View Series


## ◇ Typical Electro-Optical Characteristics Curves

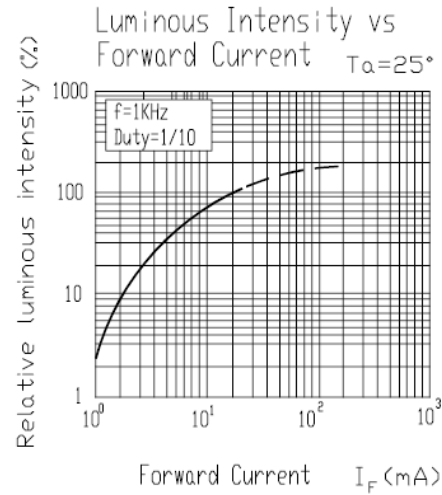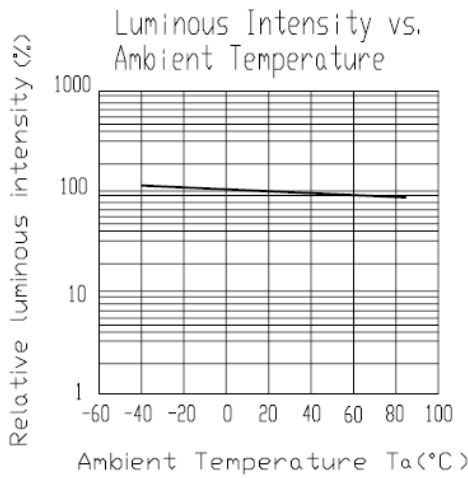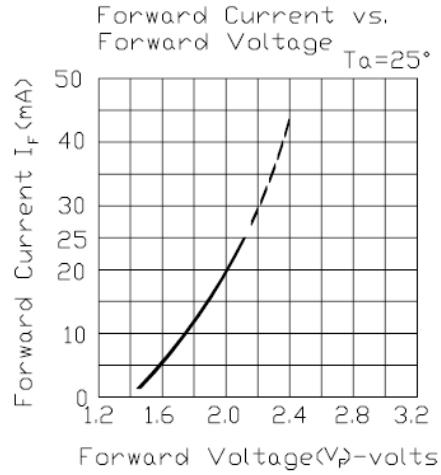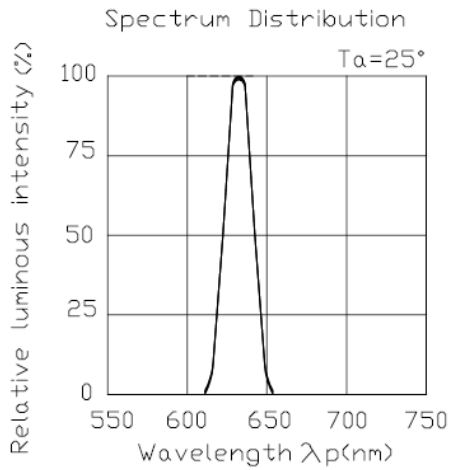

Forward Current Derating Curve

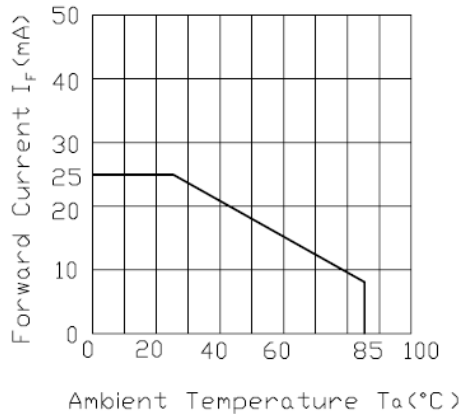

Radiation Diagram

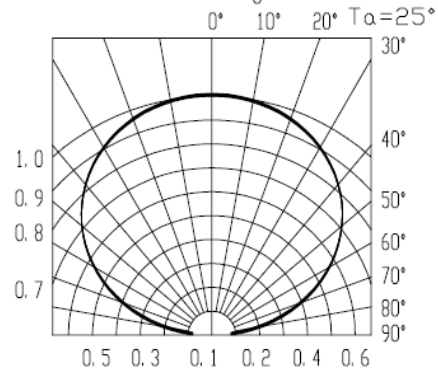



# TOYO LED ELECTRONICS LIMITED

Room 1610, Hong Kong Plaza, 188 Connaught Road West, Hong Kong.  
 Tel : (852) 2540 7288 Fax : (852) 2517 1797  
 http://www.toyo-led.com E-mail : sales@toyo-led.com



## P/N: TY-PSV0805UG1(1.0)



0805 Package 2.0\*0.6mm Surface Mount LEDs Side View Series

### ◇ Reliability Test Items And Conditions

NO.	Item	Test Condition	Test Hr/cycle/time	Sample Q'ty	Ac/Re
1	Reflow	TEMP:260±5°C; Min.5Sec	6 min	22pcs	0/1
2	Temperature Cycle	H:+100°C 15mins To(5mins) L:-40°C 15mins	300 cycles	22pcs	0/1
3	Thermal Shock	H:+100°C 15mins To(5mins) L:-40°C 15mins	300 cycles	22pcs	0/1
4	High Temperature Storage	TEMP:+260°C	1000hrs	22pcs	0/1
5	Low Temperature Storage	TEMP:-40°C	1000hrs	22pcs	0/1
6	DC Operating Life	IF=20MA	1000hrs	22pcs	0/1
7	High Temperature	85°C	1000hrs	22pcs	0/1
8	High Humidity	85%R.H.	1000hrs	22pcs	0/1

### ◇ SMT Reflow Soldering Instructions

Number of reflow process shall be than 2 times and cooling  
 Process to normal temperature is required between first and second  
 soldering process

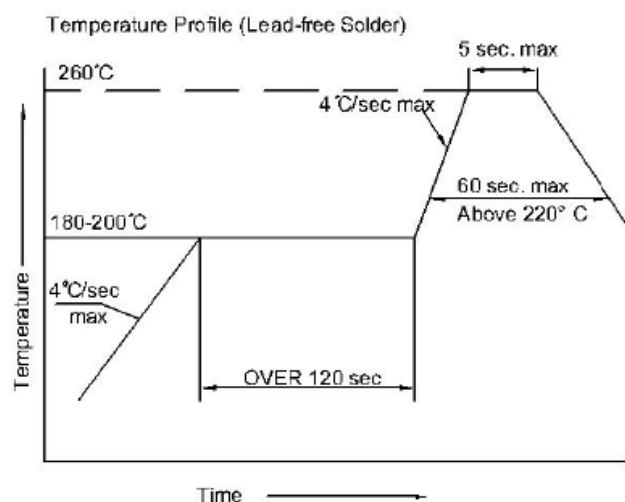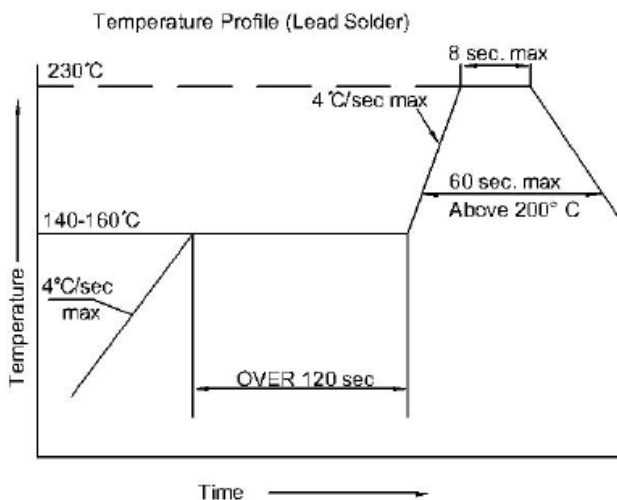



# TOYO LED ELECTRONICS LIMITED


Room 1610, Hong Kong Plaza, 188 Connaught Road West, Hong Kong.  
Tel : (852) 2540 7288 Fax : (852) 2517 1797  
http://www.toyo-led.com E-mail : sales@toyo-led.com





## P/N: TY-PSV0805UG1(1.0)

0805 Package 2.0\*0.6mm Surface Mount LEDs Side View Series

### ❖ Recommended Soldering Pad Dimensions

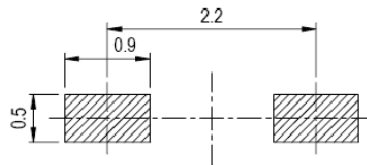

### ❖ Tape Specification: 3,000PCS per reel

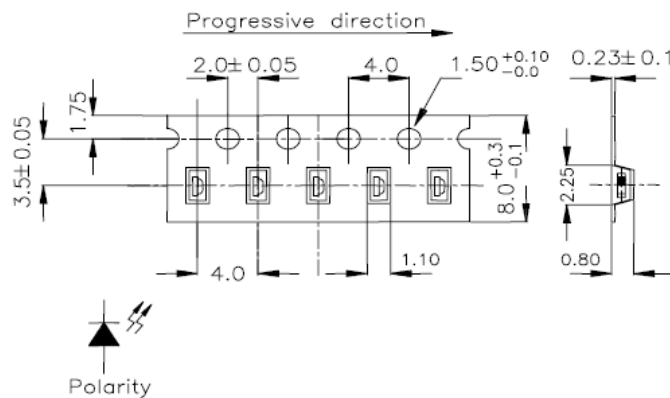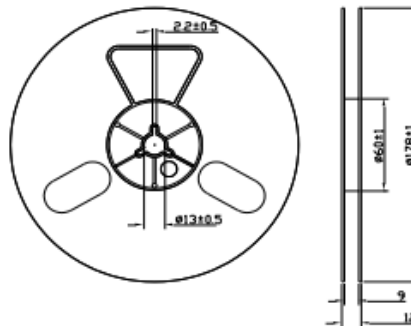

### ❖ Package Label

SMD LED	
PART NO: _____	QA Pass
LOT NO : _____	
Q' TY : _____	
VF : _____ IV : _____	
WL : _____ BIN: _____	Pb
DATA : _____	
TOYO LED ELECTRONICS LIMITED	
Website: <a href="http://www.toyo-led.com">http://www.toyo-led.com</a> E-mail: <a href="mailto:sales@toyo-led.com">sales@toyo-led.com</a>	



# TOYO LED ELECTRONICS LIMITED

Room 1610, Hong Kong Plaza, 188 Connaught Road West, Hong Kong.  
Tel : (852) 2540 7288 Fax : (852) 2517 1797  
http://www.toyo-led.com E-mail : sales@toyo-led.com



**P/N: TY-PSV0805UG1(1.0)**

0805 Package 2.0\*0.6mm Surface Mount LEDs Side View Series

## ❖ Package & Shipping Instructions

