





TOYO LED ELECTRONICS LIMITED

<http://www.toyo-led.com>

e-mail: sales@toyo-led.com

PACKAGE DIMENSION

TY-471UR5W100-600

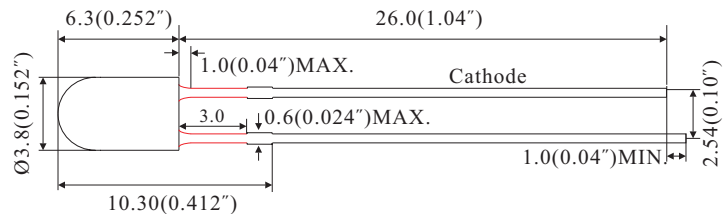

Selection Guide

Part No.	Dice		Lens Color	(If=20mA)	Viewing Angle (2θ½)
	Raw Material	Emitted Color		TYP. (mcd)	
TY-471UR5W100-600	AlGaInP	Ultra Bright Red	Water Clear	H.H. - 600	H.H. - 100°
				V.V. - 600	V.V. - 120°

Absolute Maximum Ratings at TA=25°C

Parameter	Symbol	Maximum Rating	Units
Power Dissipation	PD	78	mW
Peak Forward Current ⁴	IFP	100	mA
Forward Current	IF	50	mA
Reverse Voltage	VR	5	V
Capacitance	C	25	pF
Operating/Storage Temperature	TA/TSTG	-40°C to +85°C	
Lead Solder Temperature	TSOL	260°C for 3 Seconds	

Electrical / Optical Characteristics at TA=25°C

Parameter	Symbol	TYP.	MAX.	Units	Test Condition
Peak Wavelength	λpeak	627	-	nm	IF=20mA
Dominant Wavelength	λD	620	-	nm	IF=20mA
Spectral Line Half-width	Δλ	20	-	nm	IF=20mA
Forward Voltage	VF	1.90	2.25	V	IF=20mA
Reverse Current	IR	-	10	uA	VR=5V

Notes:

1. All dimension are in millimeter (inches);
2. Tolerance is ±0.25mm(0.01") unless otherwise specified;
3. Not recommend to solder within 3mm from the resin;
4. 1/10 Duty Cycle, 0.1ms Pulse Width.