



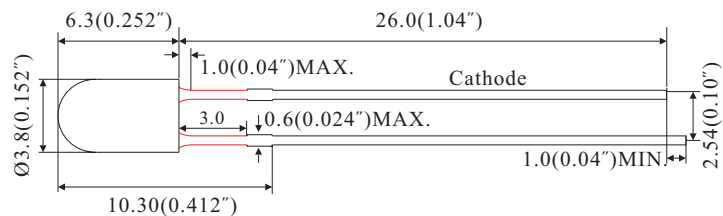

PACKAGE DIMENSION

TY-471WH5W65-1500



Selection Guide

Part No.	Dice		Lens Color	(If=20mA)	Viewing Angle (2θ½)
	Raw Material	Emitted Color		TYP. (mcd)	
TY-471WH5W65-1500	InGaN	White	Water Clear	H.H. - 1550	H.H. - 65°
				V.V. - 1500	V.V. - 100°

Absolute Maximum Ratings at TA=25°C

Parameter	Symbol	Maximum Rating	Units
Power Dissipation	PD	100	mW
Peak Forward Current ⁴	IFP	100	mA
Forward Current	IF	25	mA
Reverse Voltage	VR	5	V
Capacitance	C	20	pF
Operating/Storage Temperature	TA/TSTG	-40°C to +85°C	
Lead Solder Temperature	TSOL	260°C for 3 Seconds	

Electrical / Optical Characteristics at TA=25°C

Parameter	Symbol	TYP.	MAX.	Units	Test Condition
Chromaticity Coordinates	x	0.31	-	nm	IF=20mA
	y	0.32	-	nm	IF=20mA
Spectral Line Half-width	Δλ	20	-	nm	IF=20mA
Forward Voltage	VF	3.50	4.00	V	IF=20mA
Reverse Current	IR	-	100	uA	VR=5V

Notes:

1. All dimension are in millimeter (inches);
2. Tolerance is ±0.25mm(0.01") unless otherwise specified;
3. Not recommend to solder within 3mm from the resin;
4. 1/10 Duty Cycle, 0.1ms Pulse Width.